

# CVI-HB24R60/2712-4M

## 4MP WDR IR BULLET CAMERA



### Features:


- 1/3" CMOS
- 2560x1440 Full 4MP HD real-time
- HD and CVBS dual-output
- 2.7-12mm motorized lens
- Max. 60M Smart IR
- IP67 rated
- DC12V



## Specifications:

| Model                    | CVI-HB24R60/2712-4M  |
|--------------------------|--|
| <b>CAMERA</b>            |  |
| Image Sensor             | 1/3" CMOS  |
| Effective Pixels         | 2688(H)×1520(V), 4.1MP                                       |
| Scanning System          | Progressive  |
| Electronic Shutter Speed | PAL: 1/4s – 1/100,000s<br>NTSC: 1/3s – 1/100,000s            |
| Min. Illumination        | 0.01Lux/F1.3, 0Lux when IR ON                                |
| S/N Ratio                | More than 65dB   |
| IR Distance              | UP to 60 Meter   |
| IR On/Off Control        | Auto/Manual  |
| IR LEDs                  | 4  |
| <b>Lens</b>              |  |
| Lens Typs                | Motorised lens/Fixed iris                                    |
| Mount type               | Board-in   |
| Focal Length             | 2.7-12mm   |
| Max. Aperture            | F1.3   |
| Angle of View            | H: 98° - 26°   |
| Focus Control            | Auto/Manual  |
| Close Focus Distance     | 200mm<br>7.87"   |
| <b>Pan/Tilt/Rotation</b> |  |
| Pan/Tilt/Rotation        | Pan: 0°-360°<br>Tilt: 0°-87°<br>Rotation: 0°-360°            |
| <b>Video</b>             |  |
| Resolution               | 4MP (2560x1440)  |
| Frame Rate               | 25fps@4MP, 25/30fps@1080P, 25/30fps@720P                     |
| Video Output             | Digital: HD-CVI ;<br>Analog: 1Vp-p Composite Output(75Ω/BNC) |
| Day&Night                | Auto/Manual  |
| White Balance            | Auto/Manual  |
| BLC Mode                 | BLC/HLC/WDR  |
| WDR                      | 120dB  |
| Gain Control             | AGC  |
| Noise Reduction          | 2D/3D  |
| Smart IR                 | Auto/Manual  |
| <b>General</b>           |  |
| Input Voltage            | DC12V±25%  |
| Power Consumption        | Max. 11.1W   |
| Weight & Dimension       | 610g, 213mmx90.4mmx90.4mm                                    |
| IP Rating                | IP67   |
| Operating temperature    | -30°C ~ +60°C  |
| Operation humidity       | < 90%RH  |

## Dimension:

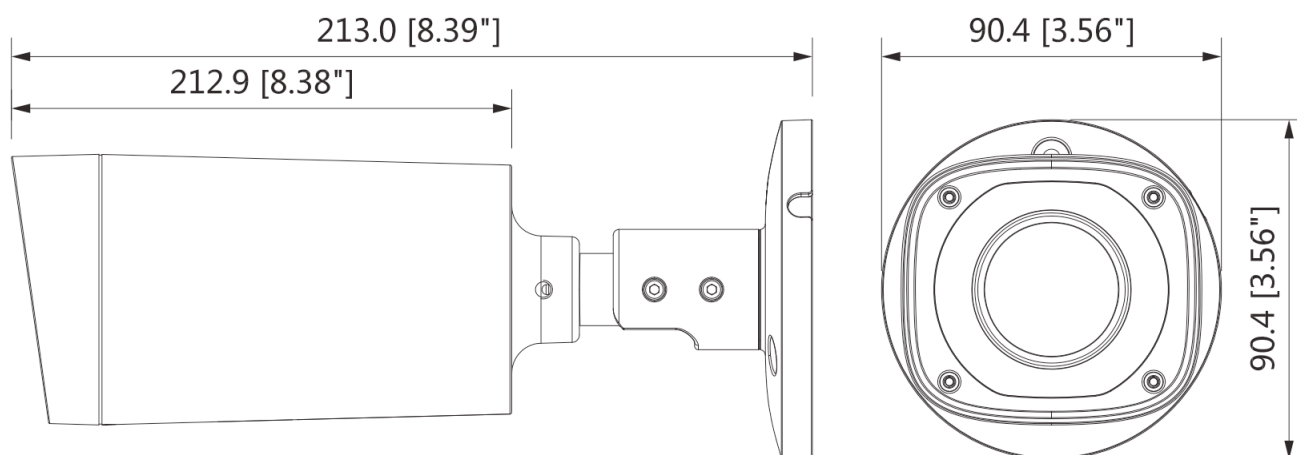

Avda. Cerdanyola, 79-81 Planta 5 Oficina 3 - 08172 Sant Cugat del Vallès (Barcelona) Tlf. + 34 936 222 111

[infoweb@innomediaseguridad.com](mailto:infoweb@innomediaseguridad.com) - [www.innomediaseguridad.com](http://www.innomediaseguridad.com)