

HALL

People Inside

128

Available Capacity


22

HIKVISION° **Density Control Solution**

To enable social distancing, it's imperative that buildings and facilities limit the number of people allowed inside.

Our Density Control Solution automatically provides clear signage and ways to avoid overcrowding.

Solutions

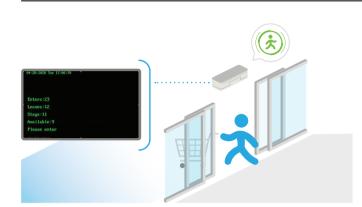

Single Door Camera Standalone **Density Control Solution**

- Ideal for small shop
- Fast deployment and cost effective, only one camera and one monitor required
- Basic numeric data shows number of people in premises - Real time alert and voice prompt from camera when
- threshold is reached





Single Door with I Series NVR **Density Control Solution**

- Ideal for retail shop with single entrance/exit
- User friendly and informative real time data screen displays maximum number accepted and current number inside store with green or red warning signs
- Ideal for placing near entrance, so customers can identify the display
- Fast deployment, only one camera, one NVR and one monitor required






Multi-Door I Series NVR Density Control Solution

- Ideal for multi entrance/exit market. - NVR calculates the total figure from all the cameras and
- displays intuitive real time data with warning symbols



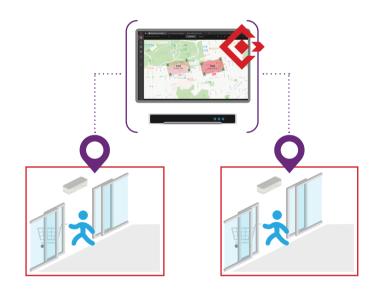

Multi-Door HikCentral Density Control Solution

like markets places, supermarkets, depots and distributions centres across multiple locations - HikCentral software calculates the total figures from all

- Ideal for large sites with multiple entrances and exits

- the cameras and displays intuitive real time data with warning symbols
- Central management to view and review whole system via HikCentral software - Business intelligence reports for further analysis



Products



Network Camera DS-2CD6825G0/C-I(V)(S)

- 1920 × 1200 @ 30fps - 2 mm fixed lens - 1/2.8" Progressive Scan CMOS
- IP66, IK08



DS-76/77/96NI-Iseries NVR

- H.265+ compression

- effectively reduces the storage _ HDMI Video output at up to 4K
- resolution



DS-5022FN

- HDMI/VGA input

- 1080P

- Plastic casing - VESA
- Base bracket included - 7*24h



management system and intelligent Analysis

HikCentral Pro provides video





- 10/100M RJ45 PoE ports

- L2

- Unmanaged







- L2 - Unmanaged

